

---

# BuzziShade 220-240V

## Product Specification Sheet

---

This document contains technical information about the BuzziShade Pendant and Standing

---



[www.buzzi.space](http://www.buzzi.space)












**The BuzziShade combines lit surroundings with acoustic performance.**

The design prevents eavesdroppers from hearing your private conversations, and reduces external noise levels to a minimum. The BuzziShade is extremely versatile. The perfect addition to any office, waiting room or restaurant and is ideal for large-scale events. Be creative in colour by adding a layer of fabric to the BuzziFelt shades. The BuzziShade is the culmination of an artistic collaboration between BuzziSpace and the four young Belgian furniture designers of Stal Collectief.

Designed by Stal Collectief

---

## General

-  Pendant | Standing
-  BuzziFelt cover
-  Powder coated metal frame
-  Fabric power cord
-  Input Voltage: 220 - 240V
-  Input Frequency: 50/60Hz
-  Class: 1
-  Dry usage
-  Assembled

---

## Acoustics



Absorption

---

## Content

Configurations	3
Technical components	5
Fabrics	8
Dimensions	10
Acoustics	15

# Configurations

## BuzziShade Pendant

◆ Medium | Large

BuzziFelt cover with lace

🌲 Metal frame in black (RAL 9005), white (RAL 9010),  
alu (RAL 9006) or fluorescent orange (RAL 2005)  
Fabric power cord in black, red or fluorescent orange

Height: 42 cm (Medium) or 62 cm (Large)


✂ Diameter: Ø 40 cm - Ø 74 cm (Medium)  
Ø 59 cm - Ø 112 cm (Large)

💡 E27 Fitting (Max. 60W)  
Excl. Bulb

⚖ Medium: 4 kg  
Large: 8 kg

⋯ Lace: black | white | fluorescent orange  
Optional extra layer Fabric | Terra | Hero  
inside or outside  
Black or alu cables 2 - 5 m

⚠ If installing on suspended ceiling, verify load capacity  
prior to installation.

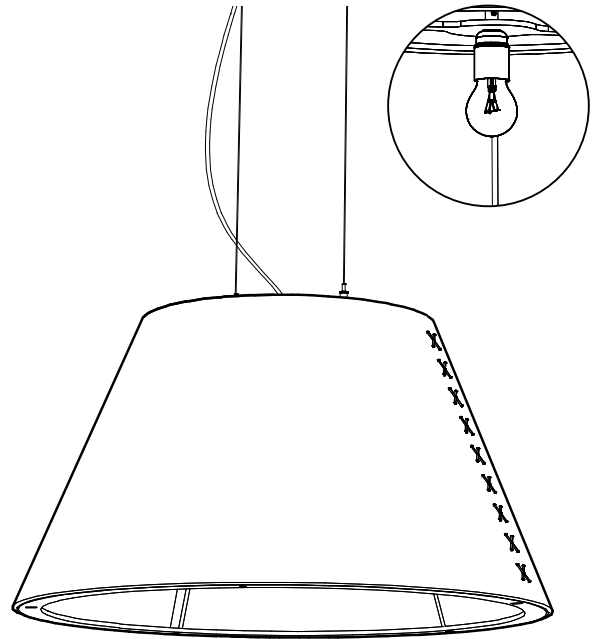

## BuzziShade Pendant LED Globe

◆ Medium | Large

BuzziFelt cover with lace

🌲 Metal frame in black (RAL 9005), white (RAL 9010),  
alu (RAL 9006) or fluorescent orange (RAL 2005)  
Fabric power cord in black

Height: 42 cm (Medium) or 62 cm (Large)

✂ Diameter: Ø 40 cm - Ø 74 cm (Medium)  
Ø 59 cm - Ø 112 cm (Large)

Wattage: 19W


LED source incl. Glass globe

💡 Lumen Output: 1500 lumen  
Color Temperature: 3000K  
Color Rendering Index: 90  
Dimmable: 1-10V Protocol

⚖ Medium: 6 kg  
Large: 10 kg

⋯ Lace: black | white | fluorescent orange  
Optional extra layer Fabric | Terra | Hero  
inside or outside  
Black or alu cables 2 - 5 m

⚠ If installing on suspended ceiling, verify load capacity  
prior to installation

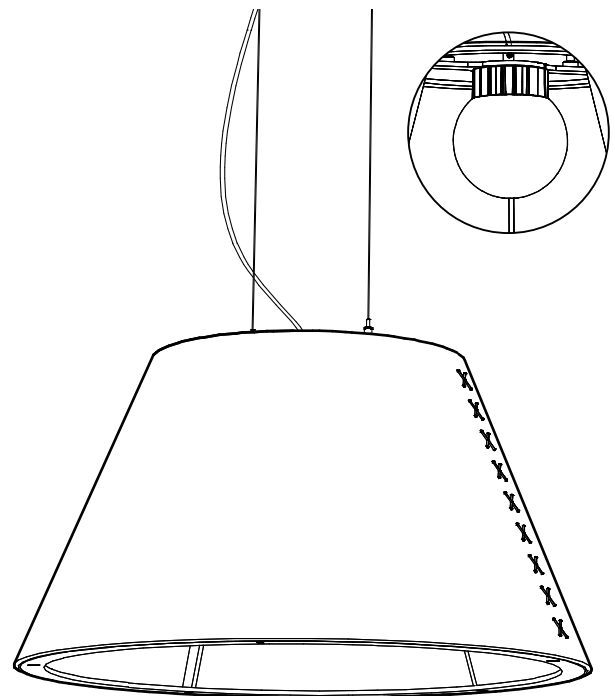

---

## BuzziShade Standing

BuzziFelt cover with lace

Metal frame in black (RAL 9005), white (RAL 9010),  
alu (RAL 9006) or fluorescent orange (RAL 2005)


🌲 Fabric power cord in black, red or fluorescent orange  
Black footswitch

✂ Height: 222 cm  
✂ Diameter: Ø 69 cm - 144 cm

💡 E27 Fitting (Max. 60W)  
Excl. Bulb

⚖ 18 kg

⋯ Lace: black | white | fluorescent orange

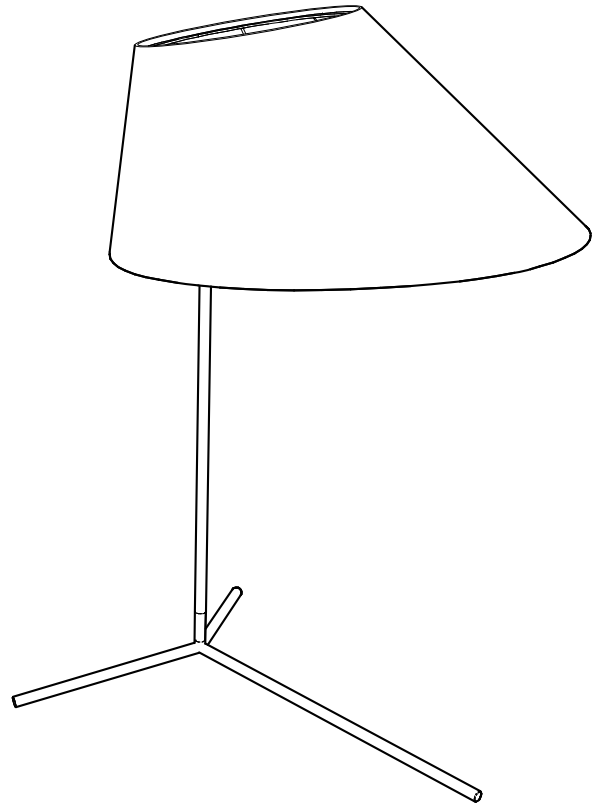

# Technical components

---

## BuzziShade Pendant

### Ceiling canopy

Powder coated metal canopy in black (RAL 9005) or white (RAL 2010)

Including mounting bracket

Height: 2,6 cm

Diameter: 12 cm



### Frame

Metal frame available in following colors:

Powder coated white		RAL 9010
Powder coated black		RAL 9005
Fluorescent orange		RAL 2005
Alu		not powder coated



### Fitting | Power cord

E27 fitting

Fabric power cord

Color frame	Color fitting	Color fabric power cord	Color Ceiling Canopy
black	black	black	black
white	white	red	white
fluorescent orange	black	fluorescent orange	black
alu	black	black	black



# Technical components

---

## BuzziShade Pendant LED

### Ceiling canopy

Powder coated metal canopy in black (RAL 9005)

Including mounting bracket

Width: 14 cm

Length: 28 cm

Height: 4 cm

### Frame

Metal frame available in following colors:

Powder coated white | RAL 9010

Powder coated black | RAL 9005

Fluorescent orange | RAL 2005

Alu | not powder coated



### Light source

LED light source with powder coated metal heat sink and ceiling canopy in black (RAL 9005) finished with a frosted glass sphere.

Height: 20 cm

Width: Ø 15 cm



---

# BuzziShade Standing

## Frame

Metal frame available in following colors:

Powder coated white | RAL 9010  
Powder coated black | RAL 9005  
Fluorescent orange | RAL 2005



## Fitting | Power cord

Black bakelite fitting E27 fitting  
Fabric power cord

<b>Color frame</b>	<b>Color fitting</b>	<b>Color fabric power cord</b>
black	black	black
white	white	red
fluorescent orange	black	fluorescent orange

Power cord has a length of 250 cm finished with a plug and footswitch.


## Power switch

Black footswitch



# Fabrics


## Felt



**Composition** 100% Recycled PE.T. Felt, latex backing  
**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>  
**Abrasion resistance** >7.000 Martindale  
**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0  
USA: ASTM E84 Class A certified  
**Fastness to light** USA 5




## Fabric



**Category** A  
**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics  
**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>  
**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek  
**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A  
**Fastness to light** EU 4 | USA 4  
**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5



## Terra




**Category** B  
**Composition** 100% Pure New Wool  
**Weight** 370 g/m<sup>2</sup> | 10.91 oz/yd<sup>2</sup>  
**Abrasion resistance** 40.000 Martindale, 25,000 Wyzenbeek  
**Flammability** EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B  
EN 1021.2/2006 | USA: CAL TB 117  
**Fastness to light** EU 5 | USA 5  
**Fastness to rubbing** EU: Wet 4 | Dry 4  
**Fastness to crocking** USA: Wet 4 | Dry 4



## Hero

kvadrat



**Category** C  
**Composition** 96% new wool, 4% nylon  
**Weight** 580 g/lin.m  
**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260  
IMO A.652 (16)  
**Fastness to light** Note 5-6, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4-5  
**Pilling** Note 3-4, EN ISO 12945





---


## Lace

Lace black | white | fluorescent orange




# Dimensions


## BuzziShade Pendant Medium

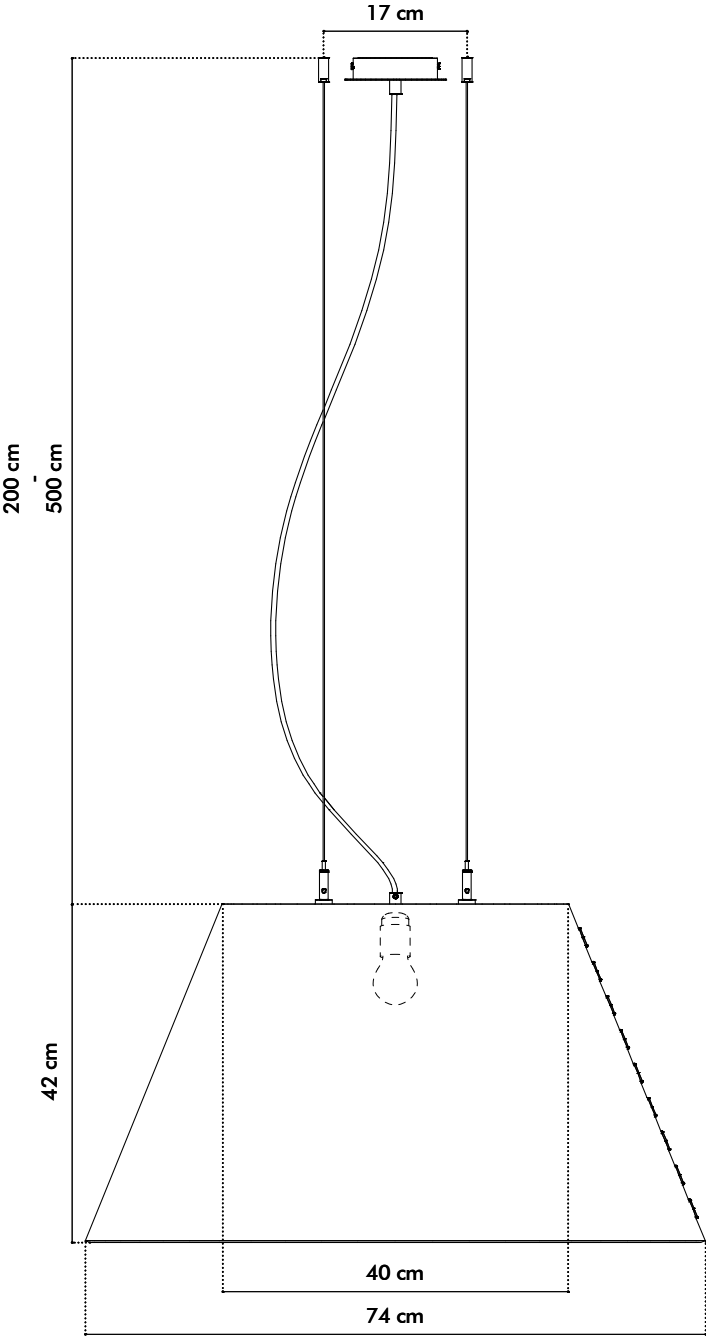


# BuzziShade Pendant LED Medium

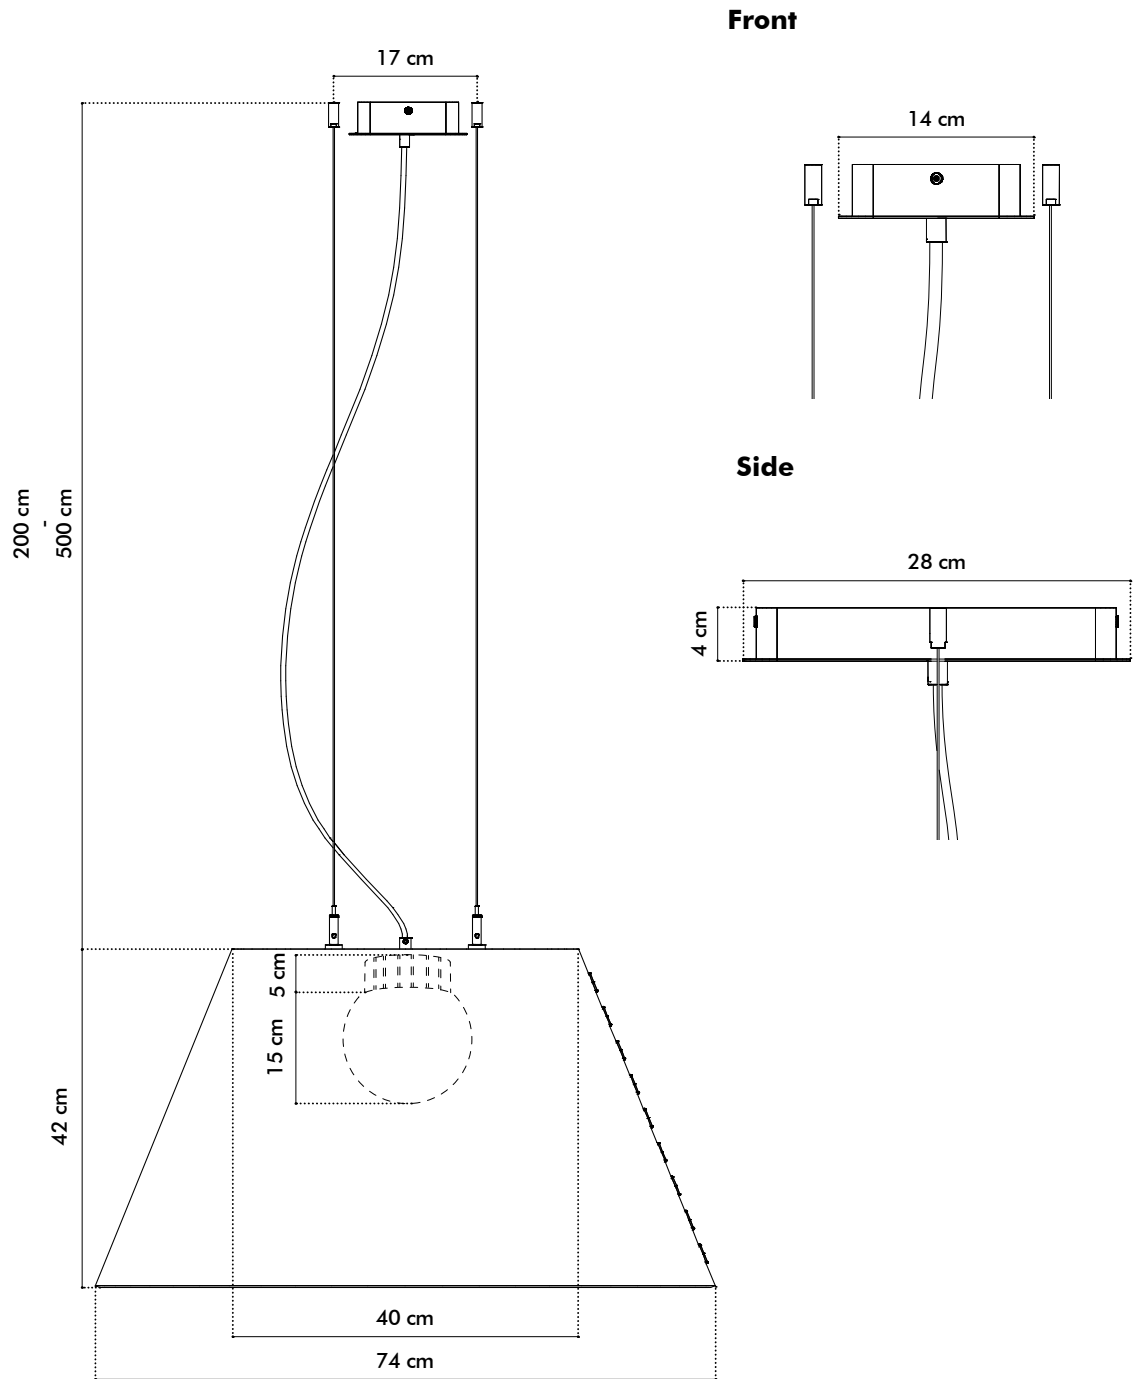



# BuzziShade Pendant Large

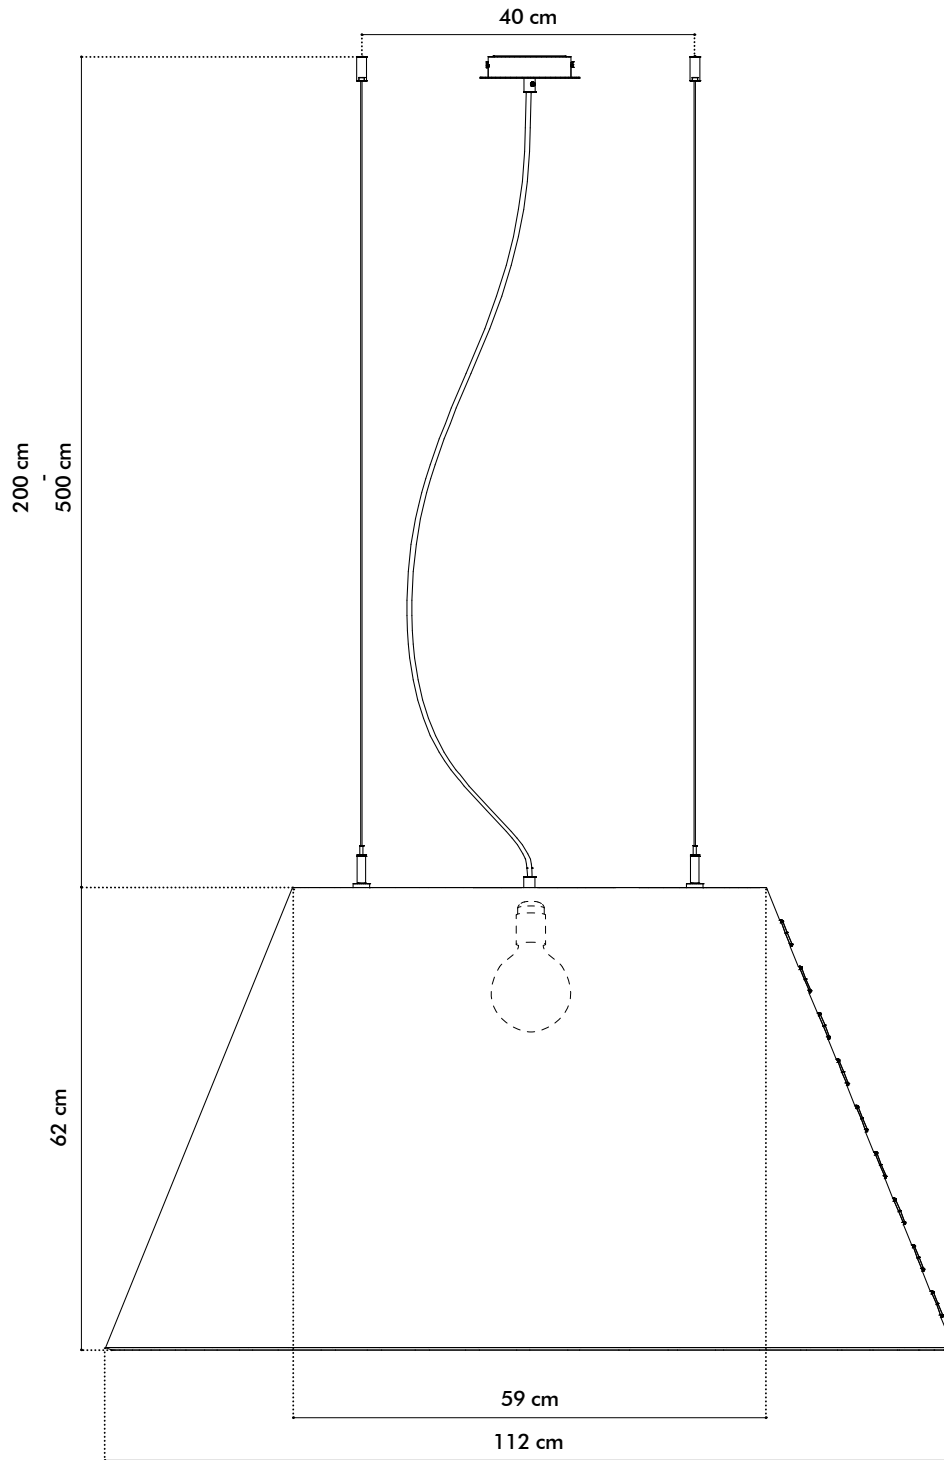

# BuzziShade Pendant LED Large

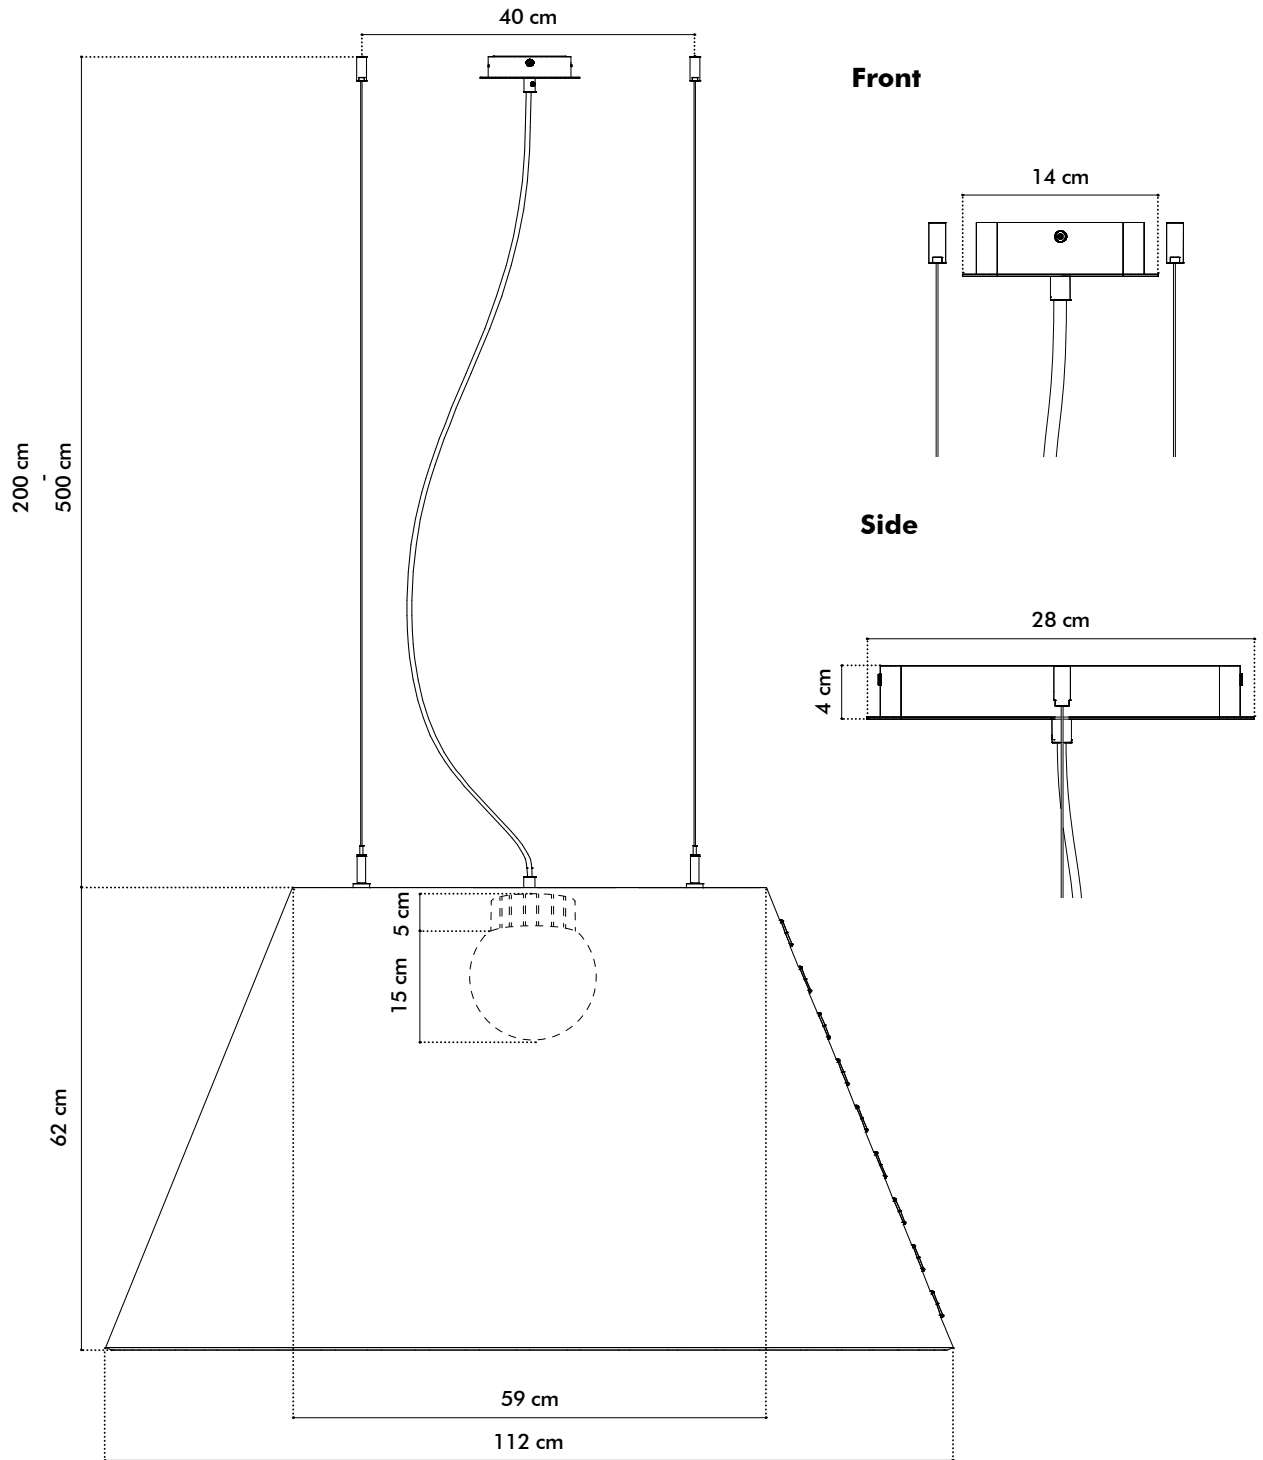


# BuzziShade Standing

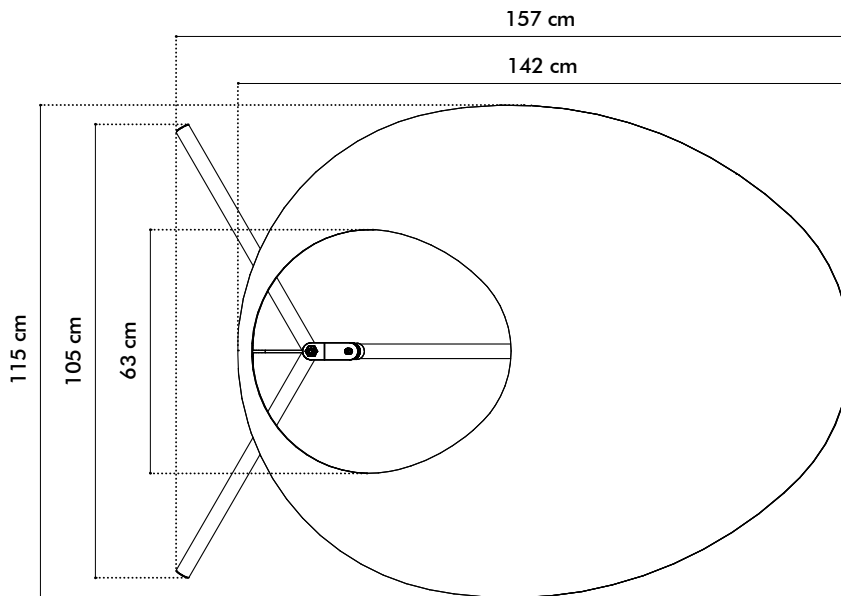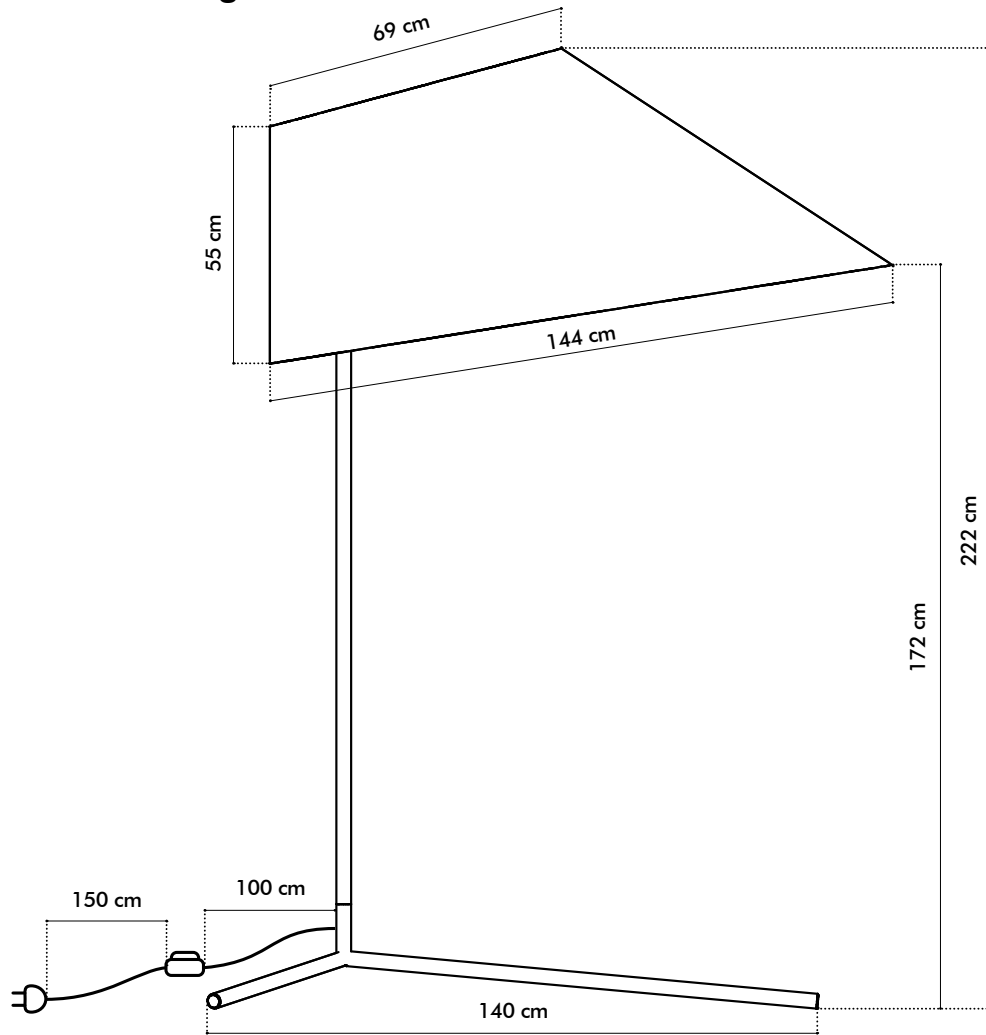

# Acoustics

## BuzziShade

Equivalent sound absorption area in m<sup>2</sup> per object

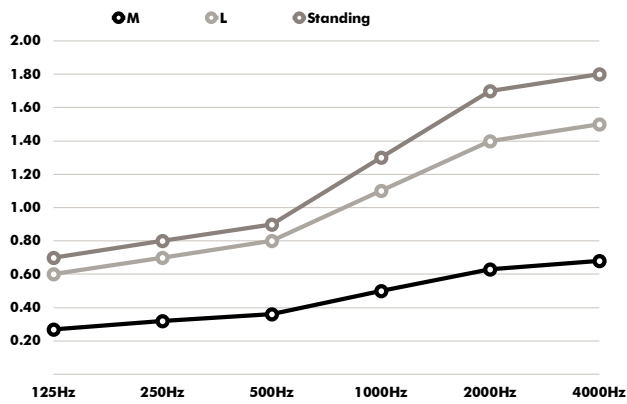

Hz	Shade M Aeq/m <sup>2</sup>	Shade L Aeq/m <sup>2</sup>	Shade Standing Aeq/m <sup>2</sup>
125	0.27	0.60	0.70
250	0.32	0.70	0.80
500	0.36	0.80	0.90
1000	0.50	1.10	1.30
2000	0.63	1.40	1.70
4000	0.68	1.50	1.80